


Hour Meter Connections

Battery Power Source 12,24,36 or 48 Volts

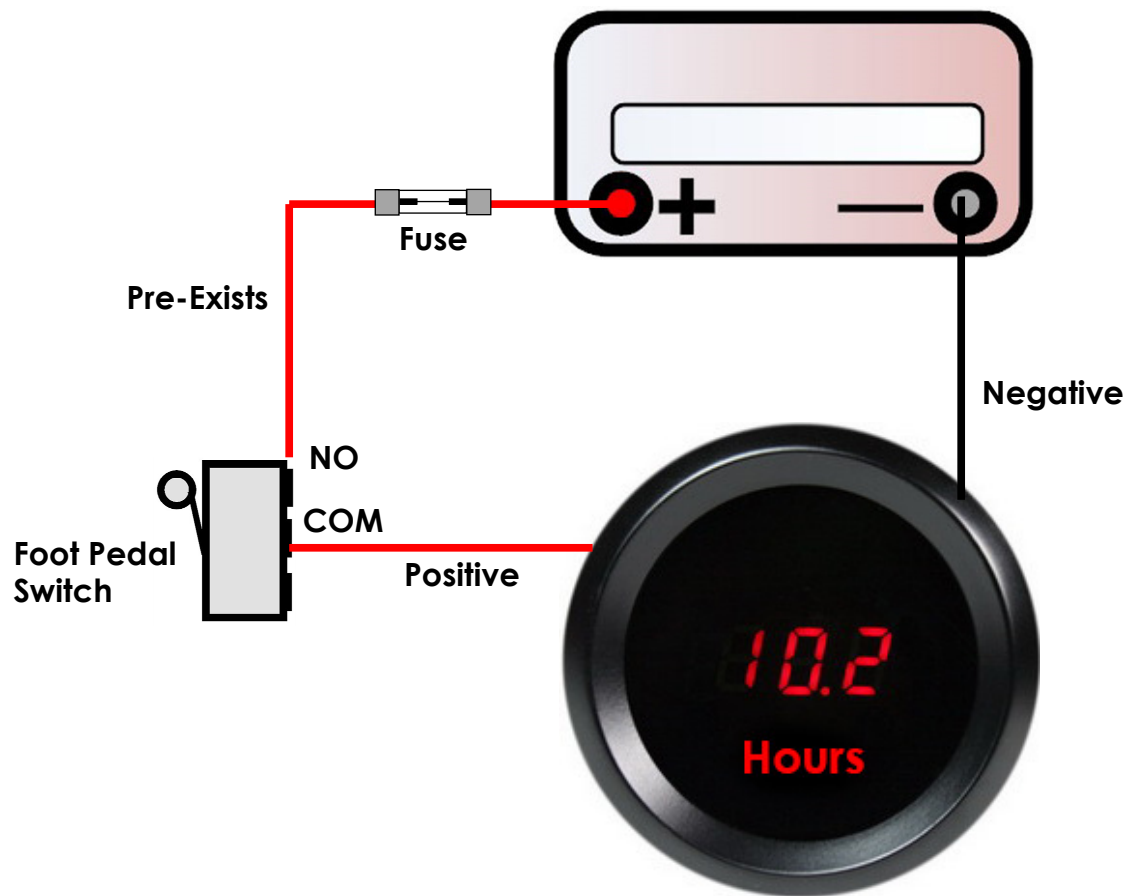

For TXT model golf cars you have three versions. DCS, PDS and NON-DCS cars and each one is wired a little different. Your first step is to confirm exactly what system your car is using. The serial number does not reflect the system.

We recommend connecting the meter to a hard negative as shown in the drawing. Locate your foot pedal switch. Determine if you have a DCS system. If you do connect the positive meter wire to wire color green. If you have a PDS system locate wire color green. If you have a NON-DCS locate the red wire.

What we are doing is allowing the meter to only function during actual run time. We do not want to use the key switch as that will allow unlimited running.