


**FF YA3B ... BLK Yamaha Folding Rear Seat Kit**  
**Kit Includes**

- 1X Step Plate (A)
- 1X Folding Deck (B)
- 2X Front Seat Back Uprights (C)
- 2X Handrails (D)
- 1X Rear Seat Cushion Set (E)
- 2X Deck Support Brackets (F)
- 2X Rear Seat Back Uprights (G)
- 1X Canopy Frame (H)
- 1X Rear Seat Back Uprights (I)
- 1X Hardware Kit (Not Shown)



**Caution:**  
Always disconnect the negative battery cable from the battery or battery pack before beginning. If your car is equipped with a Tow/Run switch, place the switch in the Tow position first. Always wear the appropriate eye protection!

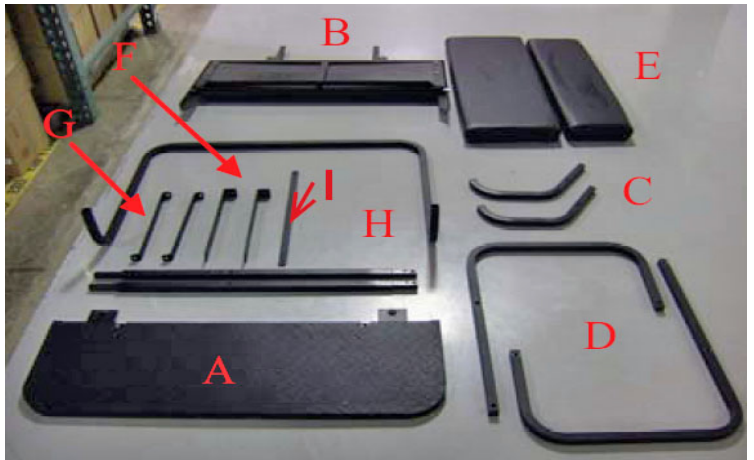

1. Remove the six bolts holding the plastic canopy to the aluminum canopy frame. Lift the canopy off the frame and set aside. See Figure 1.



**Figure 1**

2. Remove the front seat backs from the OEM seat back uprights. Set this original hardware aside as it will be reused. Remove the four bolts holding the rear canopy supports to the bag rack. Separate the rear and middle pieces of the canopy frame from the front support and set aside. See Figure 2.



Figure 2

3. Remove the access panel. Remove the four bolts holding the front seat back uprights to the frame. Set this hardware aside for later use. Remove the seat back uprights and bag rack from the cart. See Figure 3.



Figure 3

4. Remove the two bolts securing the rear bumper to the frame and remove the bumper from the cart. See Figure 4.



Figure 4

5. The rear seat plate will install onto the car in location as the factory bumper. Place the step plate mounting tabs on top of the frame gussets and secure with two 3/8-16 X 1" bolts and washers. Install folding deck rear supports onto step plate using two 3/8-16 X 1.75" bolts and washers. The folding deck rear supports install from underneath the step plate. See Figure 5. **Do not tighten hardware at this time.**



Figure 5

6. Install the two replacement front seat uprights into the frame with the OEM hardware. Install the factory front seat backs onto the new uprights with existing hardware. See Figure 6. Tighten seat back mounting bolt, **but leave the upright to frame bolts loose.**



Figure 6

7. Lay the folding deck onto the rear supports. Using two 5/16-18 X 1.75" bolts, washers, and lock nuts, secure the front of the folding deck to the front seat back uprights. Use the provided 5/16" spacers in between the Folding deck & seat back uprights to ensure proper alignment of the front seat backs. The folding deck rear supports will be secured with two 3/8-16 X 1" bolts, washers, and lock nuts. Install each of the two handrails onto the folding deck and step plate using two 5/16-18 X 1.5" bolts, washers, and lock nuts for the folding deck mounts and one 5/16-18 X 2.75" bolt, washer set, and lock nut for the step plate mount. See Figure 7.



Figure 7



Figure 8

8. Assemble roof frame using the provided rear strut supports and center sections. Secure by installing rear seat back uprights using two 1/4-20 X 2.75" bolts, washers, and lock nuts for the front seat back upright mounts and two 5/16-18 X 1" bolts, washers, and lock nuts for the folding deck mounts. See Figure 8.

9. Now go back through the rear seat kit and tighten all hardware left loose in the previous steps and reinstall the rear access panel.

10. Attach the rear seat bottom cushion to the folding deck frame with six 1.25 wood screws. Install the pull strap between the seat bottom and folding deck frame and secure with the upper middle wood screw. See Figure 9.

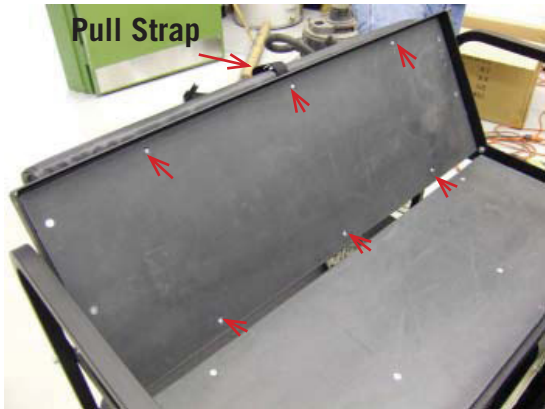


Figure 9

11. Install rear seat back and rear seat back brace onto the rear seat back uprights with two 1/4 X 1" bolts. The rear seat back brace installs on the inside of the rear seat back uprights. See Figure 10.



Figure 10

12. Reinstall the canopy using original hardware.

**INDEMNIFICATION AND INSURANCE AGREEMENT**

The Folding Rear Cargo Seat purchaser assumes sole and entire responsibility for, and shall indemnify and save harmless Nivel Manufacturing, from any and all claim, liability, responsibility, and damage, or any costs or expenses resulting from any loss of life or injuries or claimed injuries to persons or property that may be sustained in connection with the use of any product before or after purchase, including but not limited to Folding Rear Cargo Seat. The Folding Rear Cargo Seat purchaser also shall indemnify Nivel Manufacturing and save Nivel Manufacturing harmless with respect to any and all liability that may be incurred.

Golf cars are recommended for use only by those aged 16 and older. Golf cars can be especially hazardous to operate. Always remember that riding and alcohol/drugs don't mix. Never ride on public roads. Never carry more than 4 passengers (except shuttles and trams). Never engage in stunt driving. Avoid excessive speeds and be particularly careful on difficult terrain. Nivel Manufacturing reserves the right, at any time, to discontinue or change specifications, prices, designs, features, models or equipment without notice and without incurring any obligation.