


NFB YA5 5127, NFB YA5 CHR,
NFB YA5 SS, NFB YA5 BLK.
NFB YA5 RED
NERF BAR KIT
FOR MODELS G14-G22



Remember to wear
appropriate eye
protection!

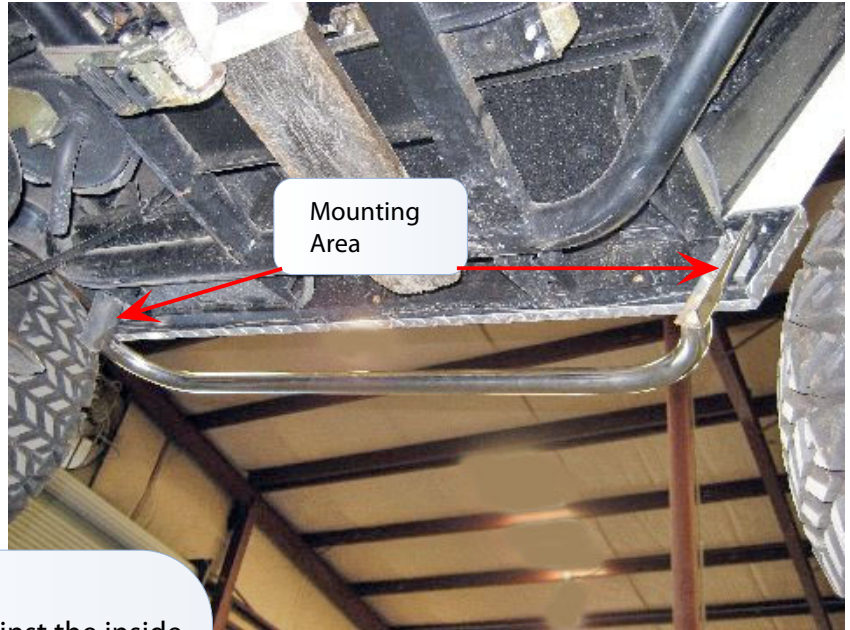

Installation

Place the Nerf Bar with 1" spacers against the inside of the rocker or kick panel of the cart. Mark the proposed hole locations.

Note: Before drilling, make sure hole locations do not interfere with the carts original gussets, brackets or accessory wiring on the backside of rocker panels!

Note: It's recommended to hold the screw and tighten the nut. Tightening the screw and holding the nut could cause sharp burrs to be peeled up on the screw face, causing a hazard.

Drill two 5/16" holes at the marked locations, matching the Nerf Bar hol pattern. Install Nerf Bar brackets behind rocker panel using a 1-1/4" x 1-1/4" spacer block. Insert one bolt through a flat washer, through the rocker panel, through the spacer, then through the Nerf Bar bracket. Secure it with the locknut supplied.

