

DSA UNV LGHTRK UNIVERSAL CIGARETTE LIGHTER Installation Instructions




The round post on the back of the lighter is positive. The housing terminal is to negative. Locate which area you want to mount the lighter (dash or body). Drill a 1 1/8" hole for mounting. Install the fuse and wiring as per the the supplied diagram.




Dash Mount



Body Mount

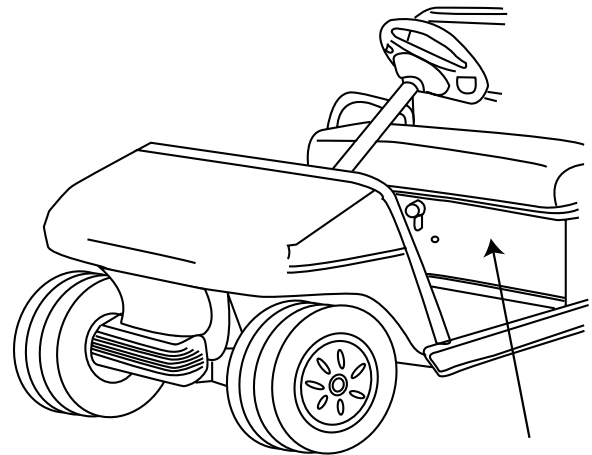

Mount lighter in a spot that is convenient in this area.

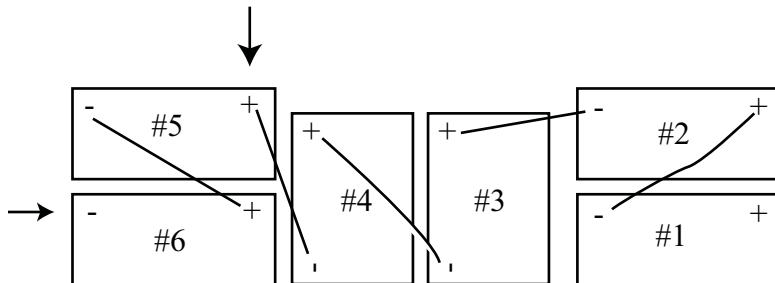


Two 6-volt batteries for 12 volts.

Two 8-volt batteries for 16 volts.

36 or 48-volt carts hook to positive on battery #5 and to negative on battery #6.

NOTE: DO NOT USE FRAME GROUND

48-volt carts require a voltage reducer.

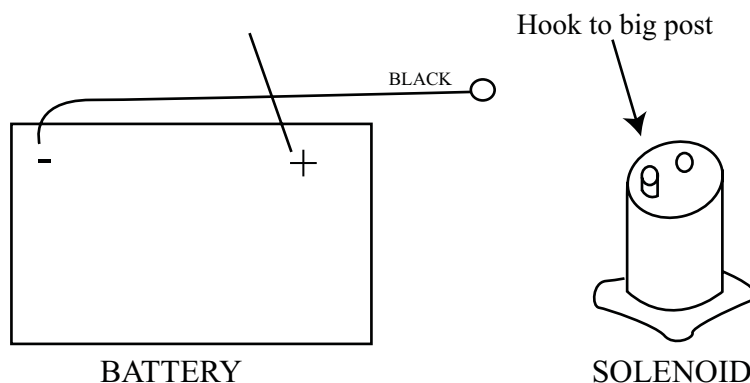

Gas cart hook to either the battery or the solenoid.

NOTE: FOR 12-VOLT GAS CARTS USE FRAME GROUND.

Buggies Unlimited
1-888-444-9994
www.buggiesunlimited.com