

02-078



LIGHT BAR KIT

WILL FIT E-Z-GO® TXT®

INSTALLATION INSTRUCTIONS

INCLUDED:

Light Bar
Light Bar Brackets
Tail Lights
Wiring Harness
Rocker Switch
6- 6x20mm bolts
2- 6mm nylock nuts
6- 6mm washers



Light Bar



Light Bar Brackets



Tail Lights



Wiring Harness


We recommend professional installation. If you choose to not have this product installed by a professional, we highly recommend that you exercise caution, care, and patience when installing this product as it involves drilling holes into your cart's body.

Turn the Key switch to OFF, put into TOW mode and engage the parking brake.



A-Loosen Top bolts enough to attach top of brackets.

B- Drill out rivets and use supplied hardware to attach bottom of brackets.

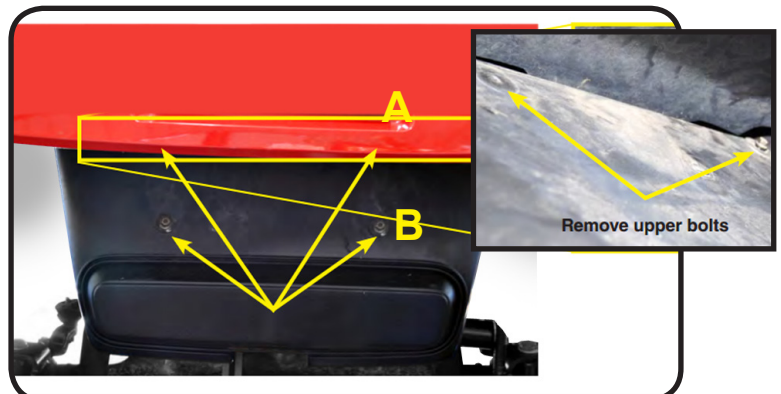


3

Remove the front seat, and remove the cup holder.



4

Install light bar to mounting brackets. Be sure not to tighten any bolts until all four are in place, then tighten. Connect red connector on harness to passenger side lights and white connector to driver's side lights.

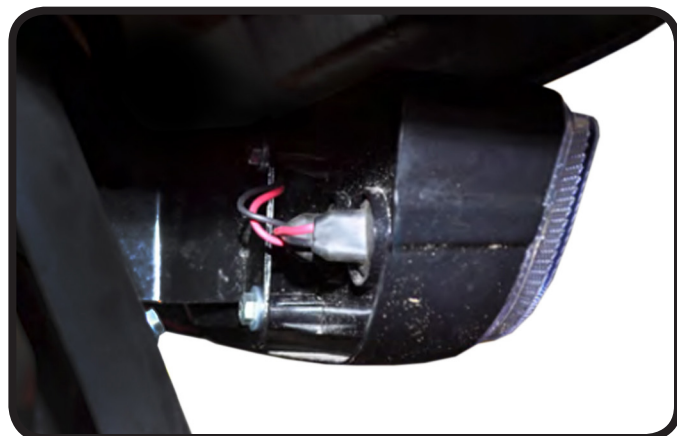

5

Place tail light template against cart. Using a writing utensil, draw the template onto the cart. Repeat on opposite side and be sure to reverse (flip over) template.



6


Drill a pilot hole and cut out the shape of the tail light.



Attach tail light to harness, then insert tail light and attach tail light to cart using provided hardware. Connector on harness to passenger side lights and white connector to driver's side lights.



Using a 15/32" drill bit, drill out the hole for the rocker switch which will be installed later.

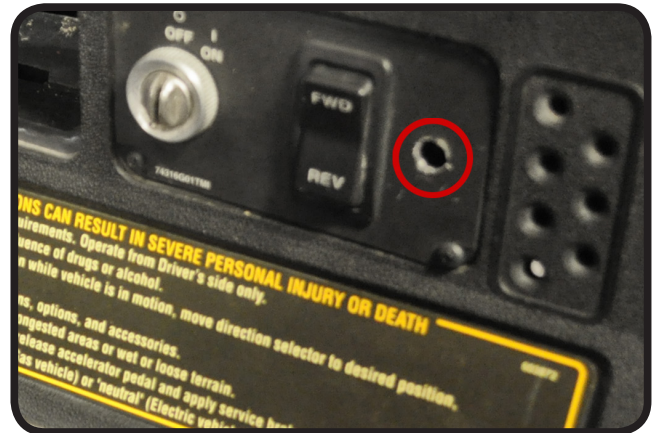

Supply - 12v(+) constant (red)
Load - 12v(+) switched (blue)


Feed threaded end of switch through the dash where the hole was drilled. Attach harness to rocker switch as shown. Attach nut to secure.

Re-attach dashboard once rocker switch has been installed to harness.



IMPORTANT: This light kit is designed for 12V power. A 16/12 voltage reducer will be needed if no 12v power available.

Connect the wiring harness to one battery's positive connection and another battery's negative connection as shown. Be sure the two batteries used are directly linked to together.

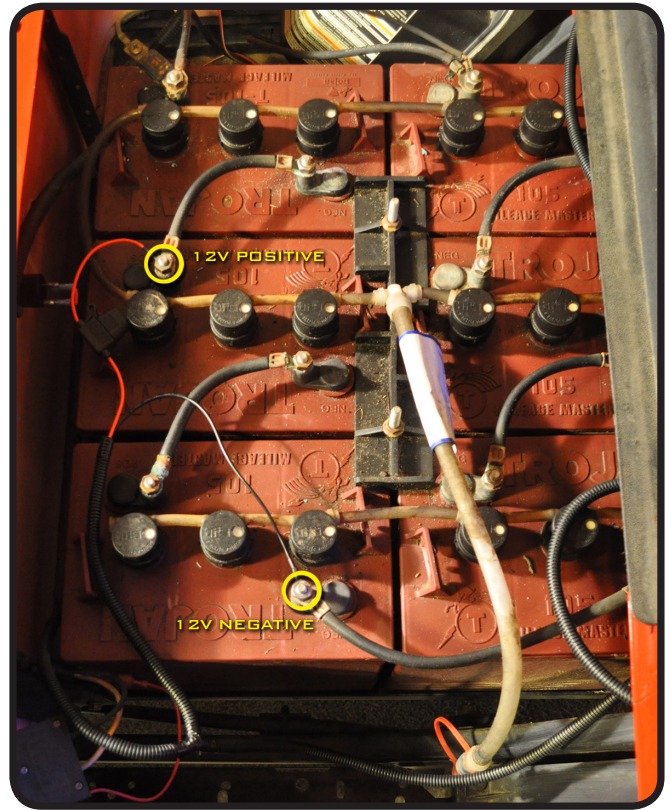

INSTALLATION COMPLETE

We recommend professional installation. If you choose to not have this product installed by a professional, we highly recommend that you exercise caution, care, and patience when installing this product as it involves drilling holes into your cart's body.

E-Z-GO®, E-Z-Go® TXT®, and E-Z-Go® RXV® are registered trademarks of Textron Innovations, Inc. Club Car®, Club Car® Precedent®, and Club Car® DS® are registered trademarks of Ingersoll Rand, Inc. Yamaha®, Yamaha® Drive®, G-14®, G-16®, G-19®, and G-22® are registered trademarks of Yamaha Golf-Car Company. Any reference to Club Car®, E-Z-Go®, or Yamaha® or their associated trademarks, word marks, and products are only for purposes of identifying golf carts with which this GTW product is compatible. GTW products are aftermarket parts and are not original equipment parts. GTW is not connected to, affiliated with, sponsored by, or endorsed by either Textron Innovations, Inc., Ingersoll Rand, Inc., Yamaha Golf Cart Company, or any of their parent or subsidiary companies.