


Stinger CLASSIC Install Instructions


Key Less, Live More!™
Teamxiq.com

Checklist before Installation

- ☐ I have an Electric Golf Cart
- ☐ The maximum current through the ignition switch does not exceed 2 Amps when the Golf Cart and all accessories are turned on.

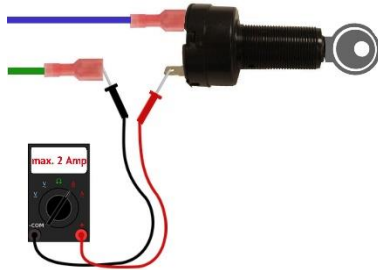

- ☐ Select your Battery Configuration:

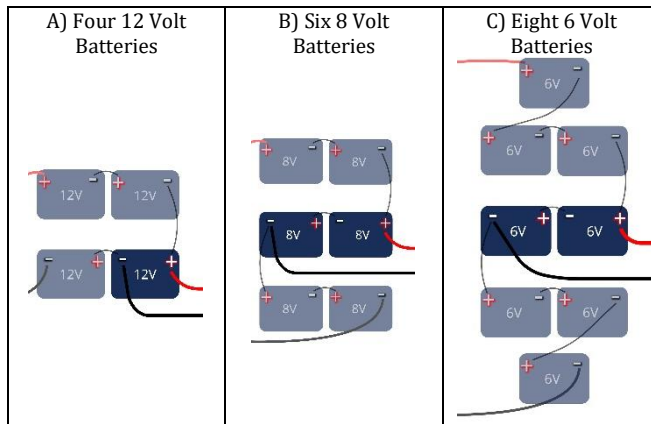

- If A) connect to a single 12 Volt Battery.
- If B) connect to TWO 8 Volt Batteries in Series to create 16 Volts.
- If C) connect to TWO 6 Volt Batteries in Series to create 12 Volts.

Installation Instructions

<p>1. Lift seat to access golf cart batteries</p>	<p>2. Connect the battery cable to the battery/batteries (depending on your battery configuration) Secure fuse with provided zip ties to ensure a good connection</p>
<p>3. Route the wire from battery to the Dashboard and secure with zip ties.</p>	<p>4. Remove the dashboard</p>
<p>5. Remove the ignition switch</p>	<p>6. Remove connectors from switch</p>
<p>7. Mount the Stinger to the dashboard.</p>	<p>8. Connect the Stinger. With provided zip ties, secure all wires tightly to the frame and battery compartment. After installation, test golf cart with Stinger turned on <u>and off</u></p>

Example Card:



Vehicle Operation

1. Enter the code (the first time, enter the last four digits found on the KEEP IN SAFE PLACE). *In this example for Stinger 170100206, the User code would be: 3433.*
2. Press red START/STOP button in the center.
3. The Stinger beeps 2 times.
4. The battery monitor LEDs should provide an indication of battery voltage level.
 - a. All 4 LEDs lit means the battery is fully charged.
 - b. 1 LED blinking means the battery is nearly drained.
5. To deactivate the Stinger, press the START/STOP button again.

Note: if the wrong User code has been entered three consecutive times, the Stinger will beep for about one minute before you are able to reenter the User code.

Change/Update User code

1. Make sure the Stinger is OFF.
2. Enter the 8 digit Mastercode (found on the KEEP IN A SAFE PLACE card) In this example for Stinger 170100206, the Mastercode would be: 43123433.
3. The battery meter should start blinking if you entered it correctly.
4. Now enter the new four digit User code, then press the start/stop button to turn the Stinger OFF.
5. Your new User code is now ready to be used and the old one is deleted.

CAUTION: The Stinger is designed to operate cart ignitions and monitor the Battery power levels. Therefore, it performs best under the specific set of conditions described in the installation process. Please install exactly as directed. DO NOT attempt to connect the Stinger in series to other accessories such as speakers, lights, voltage regulators, etc. Doing so will hinder or prevent optimum Stinger performance.

No more than 2 Amps of maximum current through the Stinger!
Make sure that connectors are mated correctly the first time.
Disconnecting and reconnecting this style of connector can damage the factory crimped wiring assembly!

