

Mounting Instructions

Decibel Soundbar Installation Options:

- Mounting Between Struts
- Mounting to Framed Top
- Mounting to Triple Track Top
- Mounting to Round Tubing


MOUNTING BETWEEN STRUTS

If mounting the soundbar between the struts, attach the adjustable brackets directly to the top of the soundbar using four (4) M6 x 30mm socket head cap screws.

Align the brackets to the inside of the struts as shown below. Mark where mounting holes need to be drilled, and using a 1/4" bit, drill two holes on each side of the struts. The hole spacing is 1 3/4".

PARTS LIST	QTY
M6 X 30 Socket Head Cap Screw	4
M6 X 45 Socket Head Cap Screw	4
M6 Washers	12
M6 Lock Nuts	4
Adjustable Brackets	2

Once the brackets are attached to the soundbar, use four (4) M6 x 45mm socket head cap screws, washers, and nuts to secure the brackets to the struts.

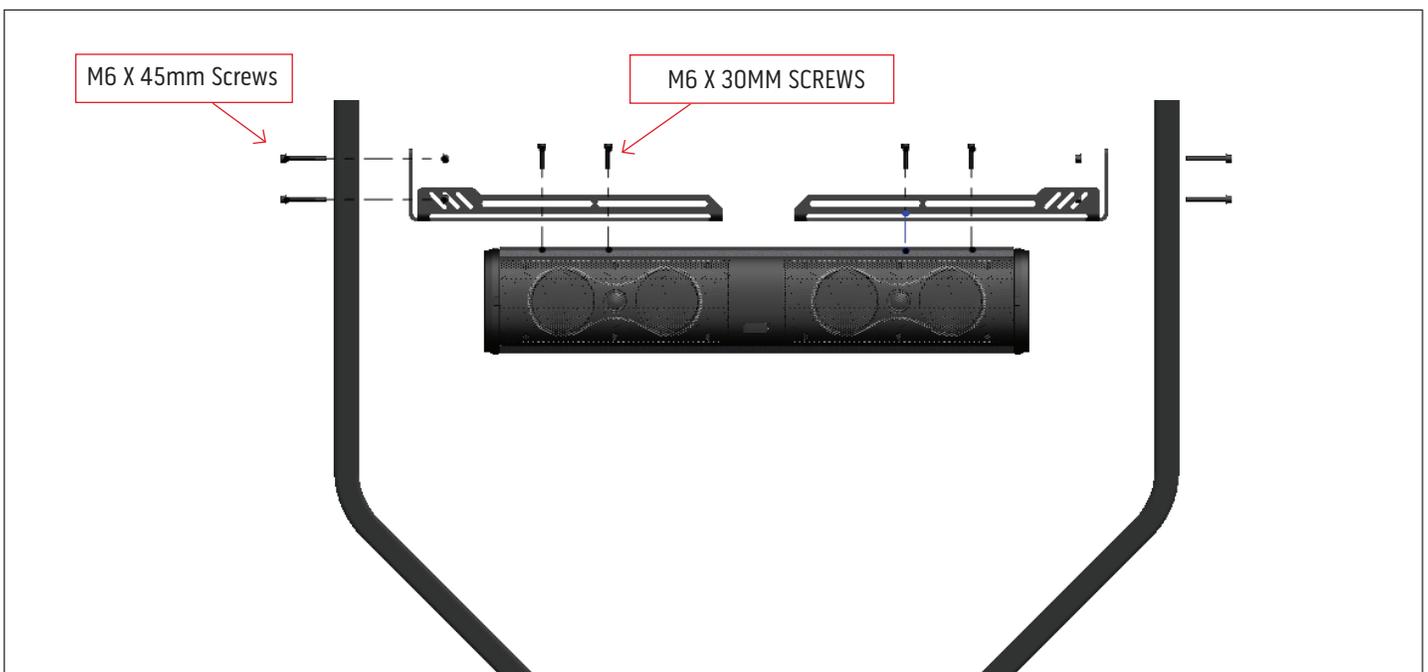


MOUNTING TO FRAMED TOP

If mounting to a framed top, attach the adjustable brackets directly to the top of the soundbar with four (4) M6x30mm socket head cap screws.

Use a ¼" drill bit for the holes where the adjustable brackets would bolt to the roof frame. The hole spacing is 1 ¾".

Use 4x M6x45mm socket head cap screws and matching washers and nuts to bolt the adjustable brackets to roof's frame.

PARTS LIST	QTY
M6 X 30 Socket Head Cap Screw	4
M6 X 45 Socket Head Cap Screw	4
M6 Washers	12
M6 Lock Nuts	4
Adjustable Brackets	2

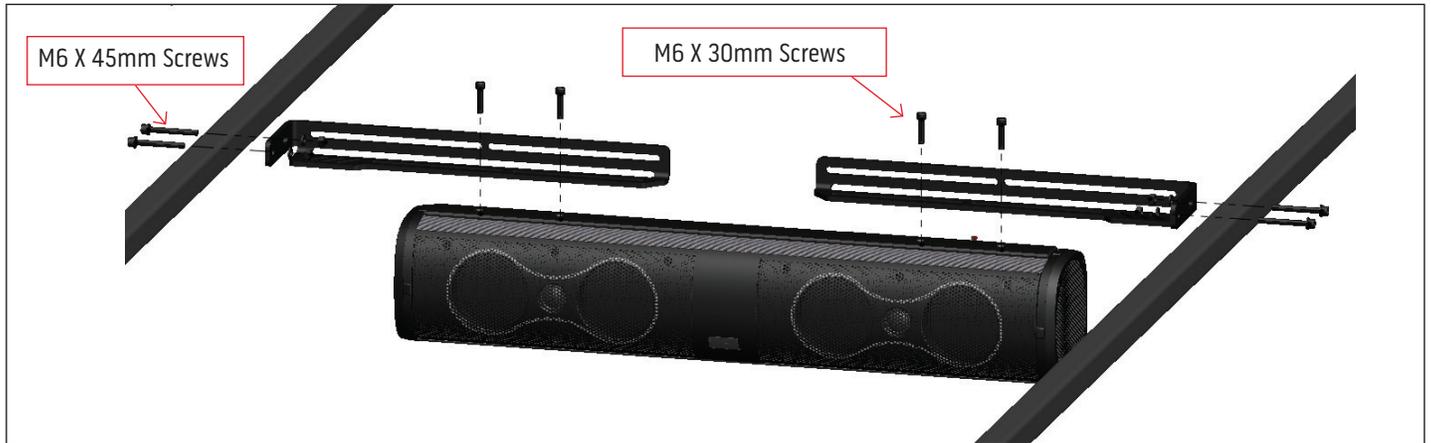


MOUNTING TO TRIPLE TRACK TOP

If mounting the soundbar to a triple track top, attach the adjustable brackets directly to the top of the soundbar with four (4) M6 X 30mm socket head cap screws.

Secure the triple track adapter brackets to the end of the main mounting brackets as shown using four (4) M6x16mm socket head cap screws.

Once the brackets have been installed, align the triple track adapter brackets to the triple track, and use four (4) M8 x 10mm socket head cap and four (4) t-nuts to secure.

PARTS LIST	QTY
M6 X 16 Socket Head Cap Screw	4
M6 x 30 Socket Head Cap Screw	4
M8 X 10 Socket Head Cap Screw	4
Adjustable Brackets	2
T-Nut	4
Triple Track Adapter Bracket	2

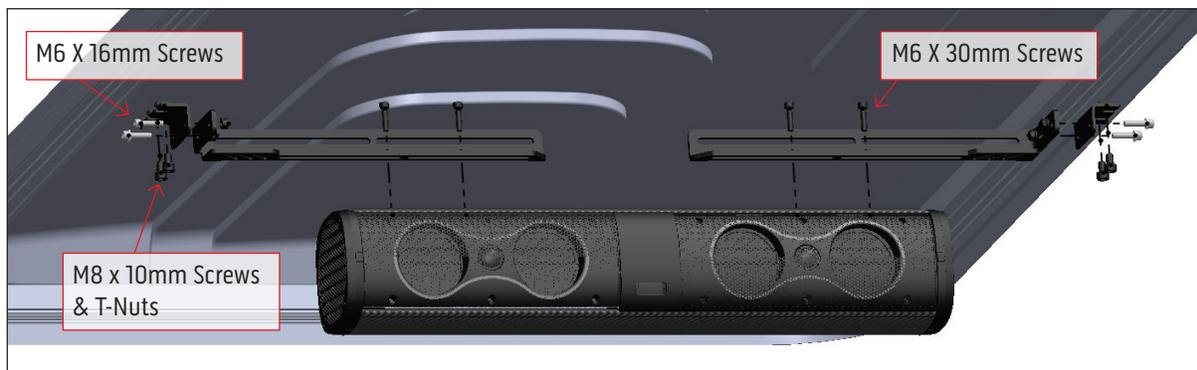

MOUNTING TO ROUND TUBING

Attach the mounting plates to the end cap brackets using four (4) M4 X 30mm flat head screws. Then attach the end cap brackets to either end of the sound bar, reusing the button head screws from the sound bar's end caps.

Position two band clamps (and optional rubber strips) around the round tube that the sound bar is being mounted to. Do not tighten yet. Lift the sound bar up and hook the band clamps around each of the mounting plates.

Insert a rubber pad between each mounting plate and the round tube, then tighten the band clamps until the sound bar is secure.

PARTS LIST	QTY
M4 X 30 Flat Head Screw	4
End Cap Bracket	2
Band Clamp	2
Mounting Plate	2
Rubber Strip	2
Rubber Pad	2

