

LHT UNV 110 UNIVERSAL DOME LIGHT

KIT Used on All Gas or Electric Carts

Dome Light Installation Instructions

1. Squeeze the sides of the clear lens to release the lock tabs and remove the plastic lens. See Figure 2
2. Remove the four screws holding the upper and lower portions of the light base together. See Figure 3
3. Find a suitable place in your cart to mount your dome light. Holding the lower half of the base in the chosen position, mark where the two $\frac{1}{4}$ " holes will need to be drilled for the mounting bolts. See Figure 3
4. Insert each screw through each of the special sealing washers, then insert each screw & washer through the top holes drilled in step 3. Make sure the rubber side of the washer is down against the top so that it will prevent water from leaking through.
5. Place the mounting base up under to top and position it so the two screws will pass through the two mounting holes. Then add the lock nuts and tighten only until the mount base is securely held in place. DO NOT OVERTIGHTEN or damage to the top and light mount base will occur.
6. Reuse the four screws removed earlier to secure the upper half of the light base to the lower half.
7. Install your batteries at this time. The dome light requires two 'C' batteries to operate (sold separately).
8. Carefully snap the plastic lens back into position.

The dome light is now fully installed and ready for use. To operate the light use the rocker switch located on the side of the unit.



Figure 1 - Kit Components



Figure 2 - Remove Lens

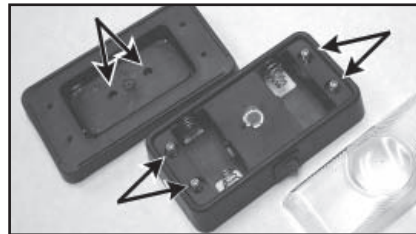


Figure 3 - Disassembled

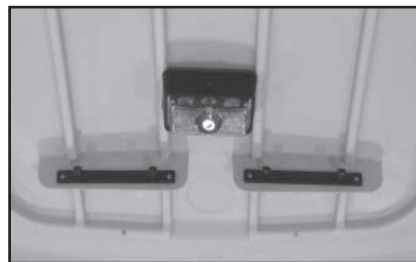


Figure 4 - Installed Under top

LHT UNV 110 UNIVERSAL DOME LIGHT

KIT Used on All Gas or Electric Carts

Dome Light Installation Instructions

1. Squeeze the sides of the clear lens to release the lock tabs and remove the plastic lens. See Figure 2
2. Remove the four screws holding the upper and lower portions of the light base together. See Figure 3
3. Find a suitable place in your cart to mount your dome light. Holding the lower half of the base in the chosen position, mark where the two $\frac{1}{4}$ " holes will need to be drilled for the mounting bolts. See Figure 3
4. Insert each screw through each of the special sealing washers, then insert each screw & washer through the top holes drilled in step 3. Make sure the rubber side of the washer is down against the top so that it will prevent water from leaking through.
5. Place the mounting base up under to top and position it so the two screws will pass through the two mounting holes. Then add the lock nuts and tighten only until the mount base is securely held in place. DO NOT OVERTIGHTEN or damage to the top and light mount base will occur.
6. Reuse the four screws removed earlier to secure the upper half of the light base to the lower half.
7. Install your batteries at this time. The dome light requires two 'C' batteries to operate (sold separately).
8. Carefully snap the plastic lens back into position.

The dome light is now fully installed and ready for use. To operate the light use the rocker switch located on the side of the unit.



Figure 1 - Kit Components



Figure 2 - Remove Lens

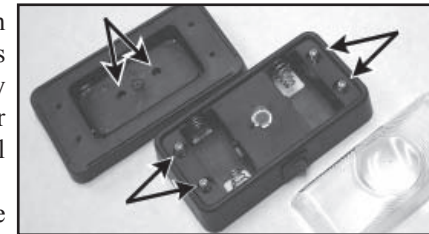


Figure 3 - Disassembled

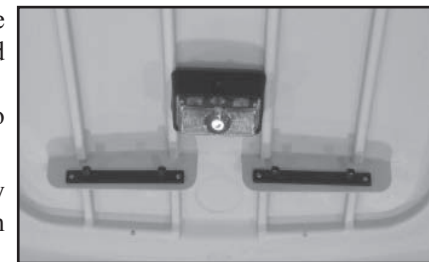


Figure 4 - Installed Under top