


SCS UNV 1400 Security System with Remote

Copyright© 1997-2010. All Rights Reserved.

1. Place control box in desired location.
 2. Mark location of 4 holes in box mounting flange.
 3. Drill 1/8" pilot holes.
 4. Mount box using provided (4) screws
 5. Connect Red wire to 8-18 volt DC positive.
 6. Connect Gray to 8-18 volt DC negative.
 7. Connect Orange to preferred cutoff location.*
 8. Connect White to preferred cutoff location.*
- *Please refer to cart manufacturer's service manual for appropriate wiring options.

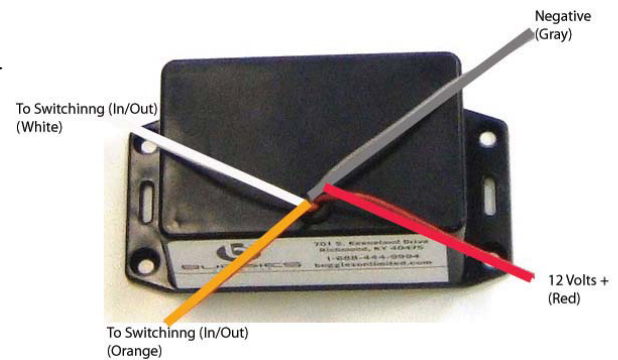

Specification:

1. Operation voltage: 8-18VDC+/-0.5V
2. Contact capability: 5A48VDC MAX.


Note: No user serviceable components. Opening control case voids any warranty.

1007 C

SCS UNV 1400 Security System with Remote

Copyright© 1997-2010. All Rights Reserved.

1. Place control box in desired location.
 2. Mark location of 4 holes in box mounting flange.
 3. Drill 1/8" pilot holes.
 4. Mount box using provided (4) screws
 5. Connect Red wire to 8-18 volt DC positive.
 6. Connect Gray to 8-18 volt DC negative.
 7. Connect Orange to preferred cutoff location.*
 8. Connect White to preferred cutoff location.*
- *Please refer to cart manufacturer's service manual for appropriate wiring options.

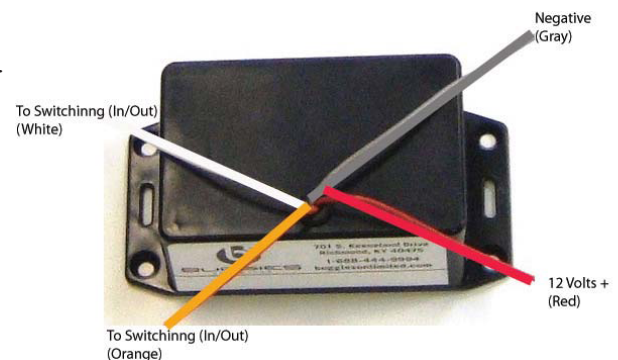

Specification:

1. Operation voltage: 8-18VDC+/-0.5V
2. Contact capability: 5A48VDC MAX.

Note: No user serviceable components. Opening control case voids any warranty.

1007 C